

HOT BONDER

AHBEASY-DV4

DUAL ZONE

Our hot bonder AHBEASY D is ideal for complex repairs involving different materials and work areas.

Ideal for on-site repairs, its compact size makes it easy to transport and handle.

It can repair very large zones and can be used with up to 12 TCs.



IDEAL FOR

- ✓ Easy to handle and transport
- ✓ Structural repairs
- ✓ 12 TCs

ADVANTAGES

- ✓ Qualification in SRM
- ✓ Easy Mode
- ✓ Archiving every 2"
- ✓ Unlimited programs
- ✓ 2 types of report (PDF, CSV)
- ✓ Fuses
- ✓ Light and compact

MAIN FEATURES

- ✓ Weight: 6,5 kg
- ✓ 10,1" touch screen
- ✓ 16 A /zone
- ✓ 6 TC baseplates /zone
- ✓ 2 USB ports

OPTIONS

- ✓ Calibration software **A10OPTCALAHB380**
- ✓ Remote Control **A11OP380-5G01**
- ✓ SMS alarm option **A11OP380DSMS**
- ✓ Hygrometer **A11OP380HYG**
- ✓ Venturi **A3VENT900V01**
- ✓ Accessory case **A6ACHBEASY-D**


HOT BONDER

AHBEASY-DV4

EASY MODE:

A user without training can run a cure **in 2 clicks**.

You do not need to be logged in.

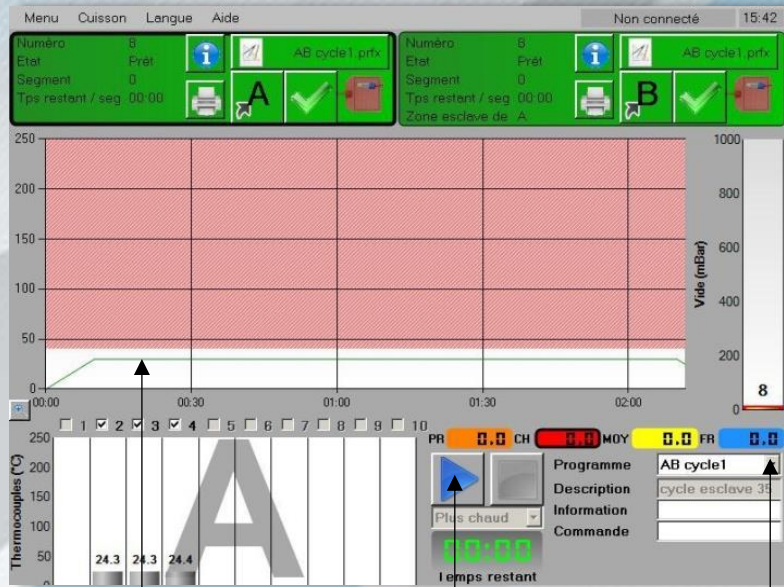

Program to be run

Click 2 : Press to run

Click 1 : Select the program among the list

SPECIFICATIONS & FEATURES :

PHYSICAL PROPERTIES	
Weight	6.5 Kg
Size	370 x 170 x 256mm
Display Type	Full color, High brightness 10.1" TFT Touch screen
Input power	100 to 240 VAC self sensing
Input amperage	16 Amp/zone
Circuit Breaker	16 Amp/zone
GFCI	30 mAmp
Vacuum	Venturi
Vacuum level	900 mbar (26,5 in Hg)
Vacuum measurement	Yes
Thermocouples type	J or K
Thermocouples per zone	6
Heating systems	Heater mat, IR Lamp, Hot gun
USB Port	2 ports (memory stick and external devices)
Printer	Matrix printer with paper 57mm width

HOT BONDER

AHBEASY-DV4

SOFTWARE PROPERTIES

Multi languages	French/English/German/Japanese/ Chinese/Dutch/Russian/Turkish
Units of measure	F°/C° mbar/bar/mmHg/inHg/PSI
Password protection	3 levels
Number of ramp / dwell	8 / 7
Modify a program in process	Yes
Parameters recorded	Set point, All thermocouples temperature, vacuum, events and alarms
Frequency recording	Every 2 seconds
Deselection of thermocouples during the cure	Yes
Control mode	Hottest, Average, Coldest or TC 1 to 10
Power failure recovery	Yes with printed notification
Alarm	Color visual and audible designation of all alarm states
Programmable without a personal computer	Yes
Number of storable cure programs	Unlimited
Number of stored cured data	Unlimited
Tracking chart values	Yes, during and after the cure
Data Acquisition (DAQ)	Yes

REPORT

Print out	Yes
Print interval	1 to 10 000 seconds
Number of print out stored cure data	Unlimited
Report type	CSV, PDF and print out at once
Report content	Show all information about the cure for traceability, including alarms and events logs on PDF format.

ALARM

Thermocouples breaks	Yes
High and low deviation process	Yes
Over Temperature	Yes (possibility: TC10 as OT trip)
Low vacuum	Yes
Power failure	Yes

HOT BONDER

AHBEASY-DV4

SMS ALARM	
Choice of events :	
- Out of band	Yes
- Over temperature	Yes
- TC problem	Yes
- 100% heating	Yes
- Vacuum level	Yes
- Power failure	Yes
End of cure	
Phone number alerted	1 to 5
SMS Test	Yes
Check the data curing on process	Yes by sending SMS
Alert	SMS and audible alarm
Type of issue mentioned in the SMS	Yes



SMS Module


ACCESSORIES	
SMS Box	1
Data Cable	1
Main Power Cable	1
SIM Card	Not included

PHOTOS & PICTURES OPTION SMS :




Click 1: Press the logo to select the SMS option, before starting the cure.

Click 2: Select the types of alarm

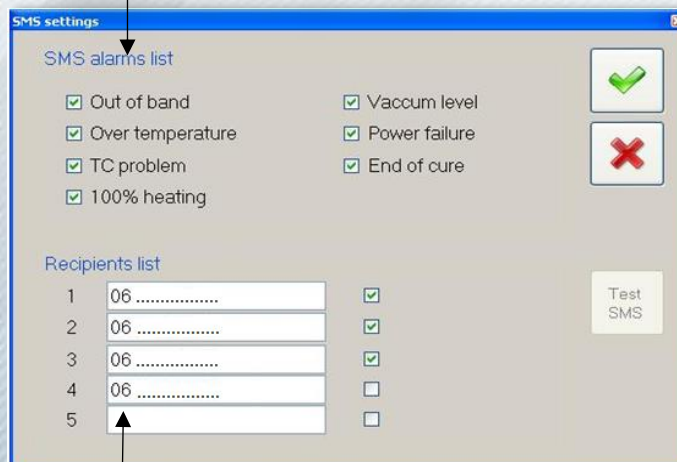


Click 3: Implement mobile numbers.

SCREENSHOTS:

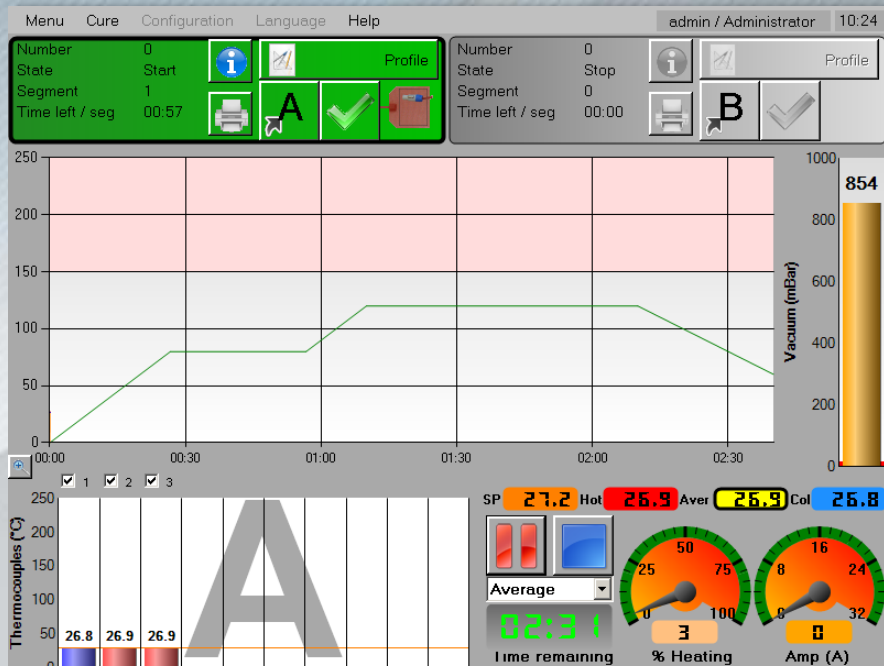

Control your curing operation

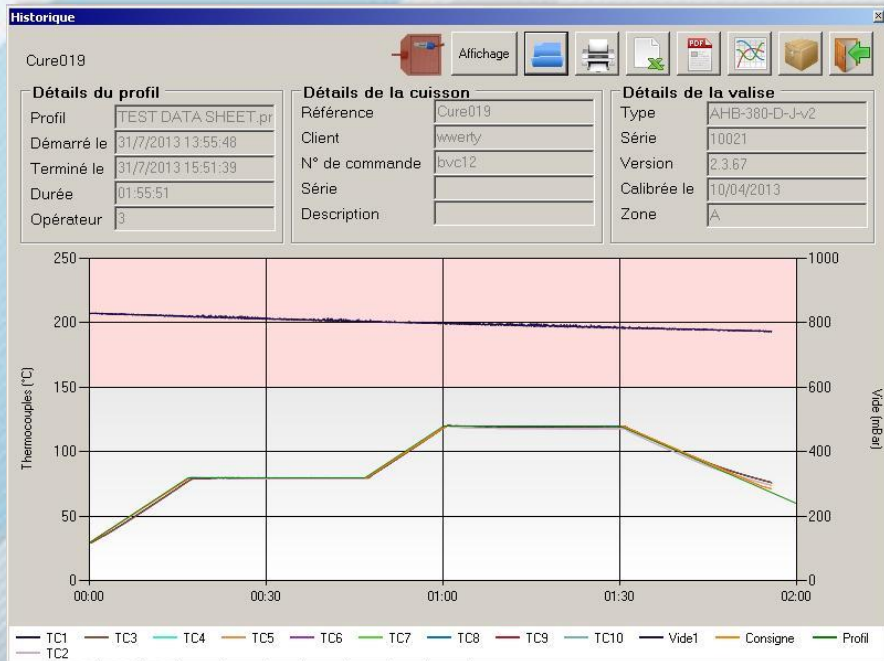

Analyze in details your cure

